

Home Charging Just Got Better.

Most homes have more than enough power for an EV charger — they just need a smarter way to use it. Home owners with limited electrical capacity turn to **Listo™ EMS** to install L2 charging **without electrical upgrades**.

Listo EMS monitors your home's power in real time and automatically balances charging alongside other appliances, so you can enjoy a fully charged car without changing anything in your home.

✓ **No Electrical Upgrades** – install up to 3 EV chargers on any panel. Simply mount 4x8" EMS next to panel.

✓ **No Harsh Power Cuts** – EV charging output is throttled up & down based on total load.

✓ **Ultimate Flexibility** – Support for townhomes, subpanels, multiple EV Chargers on same circuit

✓ **Charge with Listo & SAVE!** – As soon as Listo owners plug in, they **earn \$0.02 - \$0.06** per kWh. No catches, just cash.

Listo EMS Controller



Dual-Band Wi-Fi
Easily connect to any home Wi-Fi network. Another reason setup is a breeze!



6x CT Ports
Up to 4 ports available for future monitoring & control

5VDC Input from 120VAC
Power supply included, no hardwiring needed.



New!



Carbon Credit Rebate Program

Earn **\$0.02 - \$0.06/kWh**

Charge with Listo? **Earn cash each time you plug in. No deposits. No limits. Just a yearly bonus!**

LISTO™ Elite EMS + 40A EV Charger



Best Value

⚡ **40A / 10kW**

❄️ **NEMA 3R**

🔌 **18 or 25 Ft Cable**

✓ J1772 ✓ NACS

LISTO™ Elite+ EMS + 48A EV Charger



Fast Charging

⚡ **48A / 11.5kW**

❄️ **NEMA 3R**

🔌 **25 Ft Cable**

✓ J1772 ✓ NACS

LISTO™ PREMIUM EMS + 48A Premium EV Charger




Weather Rated

⚡ **48A / 11.5kW**

❄️ **NEMA 4X**

🔌 **18 or 25 Ft Cable**

✓ J1772

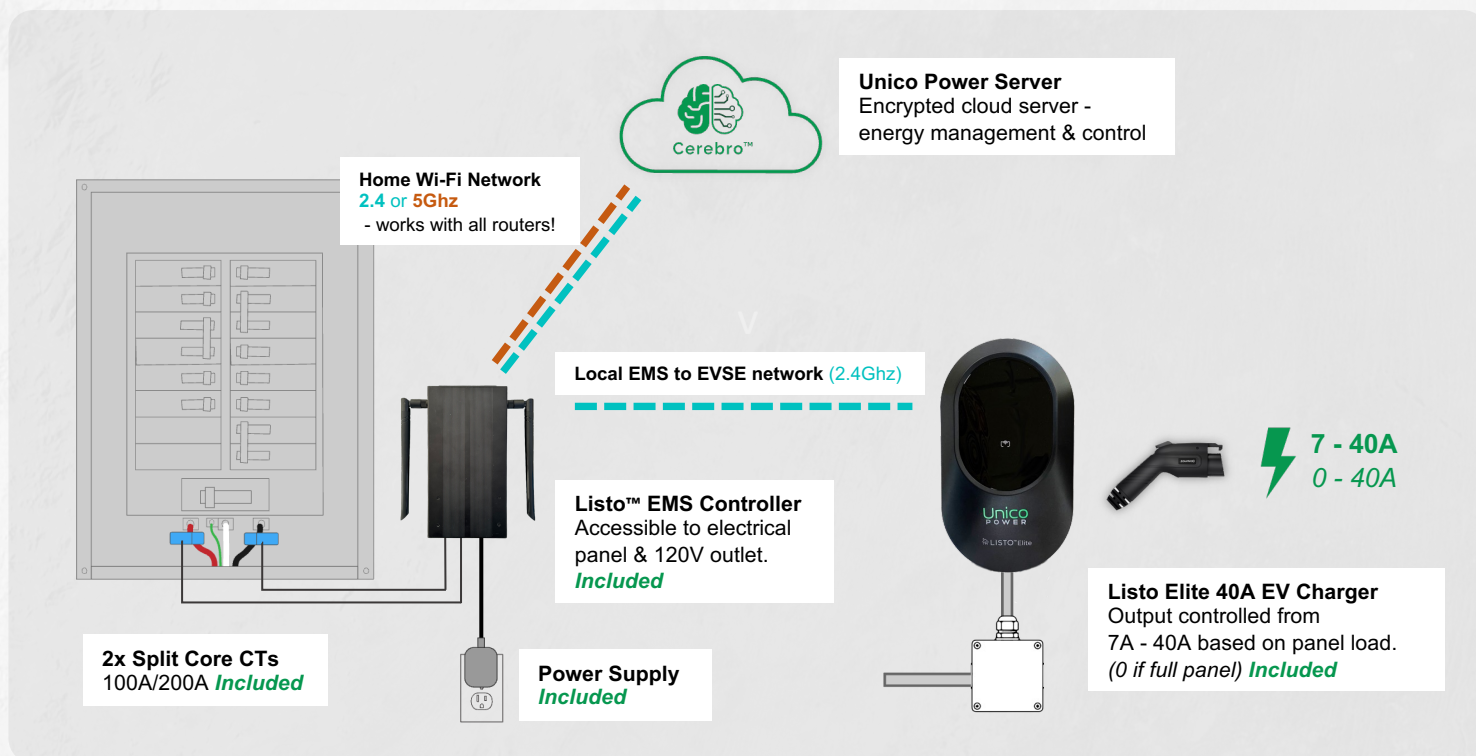

LISTO EMS

Specifications

Listo EMS Controller	Aluminum Enclosure, indoor use only 106 mm (4.2 in) x 200 mm (7.9 in) x 55 mm (2.2 in) 800 g (1 lb 12 oz)	Current Transformers	100A or 200A Voltage output, UL recognized. Up to 3 sets. 3.5 mm jack PN: ECS12100-L40G.
AC Power Adapter	120VAC/5VDC UL listed wall adapter, 5VDC input to controller via USB C	Communications	Controller to home router – Wi-Fi 802.11. EVSE to controller 802.11.
EVSE Options	Elite 40A M/N: HS100-A40, Elite+ 48 M/N: HS100-A48 or Premium 40A M/N: MC40AP14S	Controller Ventilation	Passive cooling
Wi-Fi Repeater	TP Link TL-WA850RE	Safety	Controller- CSA/ULA listed 304440, EVSE US/CSA listed 302511
EVSE Specifications	Level 2 40A & 48A. UL/CSA listed. 18 or 25 foot cable with J1772 Connector. Elite/Elite+: 3R outdoor enclosure Premium: NEMA Type 4 outdoor enclosure	Operating Temperatures	Listo Controller - -10°C to +50 °C AC Power Supply -10°C to +40°C Current Transformers -40°C to +65°C. EVSE -40°C to +55°C
Installation	Qualified electrician required, follow manufacturers installation instructions. Smart installation application available on web, iOS and Android	Warranty	3-year standard warranty on Listo Premium ,2-year on Elite/Elite+ Up to 4 years extended warranty available

